查询SST 29VE020供应商

Preliminary Specifications

SST 29VE020
2.7V-only 2 Megabit
Page Mode EEPROM

June 1997

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

SST 29VE020
2.7V-only 2 Megabit Page Mode EEPROM

Preliminary Specifications

Features:

Single 2.7-Volt Read and Write Operations
CMOS SuperFlash EEPROM Technology
- Endurance: 100,000 Cycles (typical)
- Greater than 100 years Data Retention

Low Power Consumption:
- Active Current: 10 mA (typical)
- Standby Current: 10 µA (typical)

Fast Page-Write Operation
- 128 Bytes per Page, 2048 Pages
- Page-Write Cycle: 5 ms (typical)
- Complete Memory Rewrite: 10 sec (typical)
- Effective Byte-write Cycle Time: 39 µs (typical)

Fast Access Time: 200 and 250 ns
Latched Address and Data
Automatic Write Timing with Internal V_{pp} Generation
End of Write Detection
- Toggle Bit
- Data# Polling

Hardware and Software Data Protection
TTL I/O Compatibility
JEDEC Standard Byte-wide EEPROM Pinouts
Packages Available
- 32-Pin TSOP
- 32-Lead PLCC
- 32 Pin Plastic DIP

Product Description

The 29VE020 is a 256K x 8 CMOS page mode EEPROM manufactured with SST's proprietary, high performance CMOS SuperFlash technology. The split gate cell design and thick oxide tunneling injector attain better reliability and manufacturability compared with alternate approaches. The 29VE020 writes with a 2.7-volt-only power supply. (V_{CC}: 2.7V to 3.6V) Internal erase/program is transparent to the user. The 29VE020 conforms to JEDEC standard pinouts for byte-wide memories.

Featuring high performance page write, the 29VE020 provides a typical byte-write time of 39 µsec. The entire memory, i.e., 256K bytes, can be written page by page in as little as 10 seconds, when using interface features such as Toggle Bit or Data# Polling to indicate the completion of a write cycle. To protect against inadvertent write, the 29VE020 has on-chip hardware and software data protection schemes. Designed, manufactured, and tested for a wide spectrum of applications, the 29VE020 is offered with a guaranteed page-write endurance of 10^4 or 10^3 cycles. Data retention is rated at greater than 100 years.

The 29VE020 is suited for applications that require convenient and economical updating of program, configuration, or data memory. For all system applications, the 29VE020 significantly improves performance and reliability, while lowering power consumption, when compared with 5volt EEPROM or EPROM approaches. The 29VE020 improves flexibility while lowering the cost for program, data, and configuration storage applications.

To meet high density, surface mount requirements, the 29VE020 is offered in 32-pin TSOP and 32-lead PLCC packages. A 600-mil, 32-pin PDIP package is also available. See Figures 2A and 2B for pinouts.

Device Operation

The SST page mode EEPROM offers in-circuit electrical write capability. The 29VE020 does not require separate erase and program operations. The internally timed write cycle executes both erase and program transparently to the user. The 29VE020 has industry standard optional Software Data Protection, which SST recommends always to be enabled. The 29VE020 is compatible with industry standard EEPROM pinouts and functionality.

Read

The read operation of the 29VE020 is controlled by CE# and OE#, both have to be low for the system to obtain data from the outputs. CE# is used for device selection. When CE# is high, the chip is deselected and only standby power is consumed. OE# is the output control and is used to gate data from the output pins. The data bus is in high impedance state when either CE# or OE# is high. Refer to the read cycle timing diagram for further details (Figure 3).

Write

The page write to the SST29VE020 should always use the JEDEC Standard Software Data Protection (SDP) 3-byte command sequence. The 29VE020

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

contains the optional JEDEC approved Software Data Protection scheme. SST recommends that SDP always be enabled, thus, the description of the write operations will be given using the SDP enabled format. **The 3-byte SDP Enable and SDP Write commands are identical; therefore, any time a SDP Write command is issued, software data protection is automatically assured.** The first time the 3-byte SDP command is given, the device becomes SDP enabled. Subsequent issuance of the same command bypasses the data protection for the page being written. At the end of the desired page write, the entire device remains protected. For additional descriptions, please see the application notes on "The Proper Use of JEDEC Standard Software Data Protection" and "Protecting Against Unintentional Writes When Using Single Power Supply Flash Memories" in this data book.

The write operation consists of three steps. Step 1 is the three byte load sequence for Software Data Protection. Step 2 is the byte-load cycle to a page buffer of the 29VE020. Steps 1 and 2 use the same timing for both operations. Step 3 is an internally controlled write cycle for writing the data loaded in the page buffer into the memory array for nonvolatile storage. During both the SDP 3-byte load sequence and the byte-load cycle, the addresses are latched by the falling edge of either CE# or WE#, whichever occurs last. The data is latched by the rising edge of either CE# or WE#, whichever occurs first. The internal write cycle is initiated by the T_{BLCO} timer after the rising edge of WE# or CE#, whichever occurs first. The write cycle, once initiated, will continue to completion, typically within 5 ms. See Figures 4 and 5 for WE# and CE# controlled page write cycle timing diagrams and Figures 14 and 16 for flowcharts.

The write operation has three functional cycles: the Software Data Protection load sequence, the page load cycle, and the internal write cycle. The Software Data Protection consists of a specific three byte load sequence that allows writing to the selected page and will leave the 29VE020 protected at the end of the page write. The page load cycle consists of loading 1 to 128 bytes of data into the page buffer. The internal write cycle consists of the T_{BLCO} time-out and the write timer operation. During the write operation, the only valid reads are Data# Polling and Toggle Bit.

The page-write operation allows the loading of up to 128 bytes of data into the page buffer of the 29VE020 before the initiation of the internal write cycle. During the internal write cycle, all the data in the page buffer is written simultaneously into the memory array. Hence, the page-write feature of 29VE020 allows the entire memory to be written in as little as 10 seconds. During the internal write cycle, the host is free to perform additional tasks, such as to fetch data from other locations in the system to set up the write to the next page. In each page-write operation, all the bytes that are loaded into the page buffer must have the same page address, i.e. A_7 through A_{16}. Any byte not loaded with user data will be written to FF.

See Figures 4 and 5 for the page-write cycle timing diagrams. If after the completion of the 3-byte SDP load sequence or the initial byte-load cycle, the host loads a second byte into the page buffer within a byte-load cycle time (T_{BLC}) of 100 µs, the 29VE020 will stay in the page load cycle. Additional bytes are then loaded consecutively. The page load cycle will be terminated if no additional byte is loaded into the page buffer within 200 µs (T_{BLCO}) from the last byte-load cycle, i.e., no subsequent WE# or CE# high-to-low transition after the last rising edge of WE# or CE#. Data in the page buffer can be changed by a subsequent byte-load cycle. The page load period can continue indefinitely, as long as the host continues to load the device within the byte-load cycle time of 100 µs. The page to be loaded is determined by the page address of the last byte loaded.

Software Chip-Erase

The 29VE020 provides a chip-erase operation, which allows the user to simultaneously clear the entire memory array to the "1" state. This is useful when the entire device must be quickly erased.

The Software Chip-Erase operation is initiated by using a specific six byte-load sequence. After the load sequence, the device enters into an internally timed cycle similar to the write cycle. During the erase operation, the only valid read is Toggle Bit. See Table 4 for the load sequence, Figure 9 for timing diagram, and Figure 18 for the flowchart.

Write Operation Status Detection

The 29VE020 provides two software means to detect the completion of a write cycle, in order to op-

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

timize the system write cycle time. The software detection includes two status bits: Data# Polling (DQ_7) and Toggle Bit (DQ_6). The end of write detection mode is enabled after the rising WE# or CE# whichever occurs first, which initiates the internal write cycle.

The actual completion of the nonvolatile write is asynchronous with the system; therefore, either a Data# Polling or Toggle Bit read may be simultaneous with the completion of the write cycle. If this occurs, the system may possibly get an erroneous result, i.e., valid data may appear to conflict with either DQ_7 or DQ_6. In order to prevent spurious rejection, if an erroneous result occurs, the software routine should include a loop to read the accessed location an additional two (2) times. If both reads are valid, then the device has completed the write cycle, otherwise the rejection is valid.

Data# Polling (DQ_7)

When the 29VE020 is in the internal write cycle, any attempt to read DQ_7 of the last byte loaded during the byte-load cycle will receive the complement of the true data. Once the write cycle is completed, DQ_7 will show true data. The device is then ready for the next operation. See Figure 6 for Data# Polling timing diagram and Figure 15 for a flowchart.

Toggle Bit (DQ_6)

During the internal write cycle, any consecutive attempts to read DQ_6 will produce alternating 0's and 1's, i.e., toggling between 0 and 1. When the write cycle is completed, the toggling will stop. The device is then ready for the next operation. See Figure 7 for Toggle Bit timing diagram and Figure 15 for a flowchart. The read of the Toggle Bit will typically be a "1".

Data Protection

The 29VE020 provides both hardware and software features to protect nonvolatile data from inadvertent writes.

Hardware Data Protection

Noise/Glitch Protection: A WE# or CE# pulse of less than 5 ns will not initiate a write cycle.

V_{CC} Power Up/Down Detection: The write operation is inhibited when V_{CC} is less than 2.5V.

Write Inhibit Mode: Forcing OE# low, CE# high, or WE# high will inhibit the write operation. This prevents inadvertent writes during power-up or power-down.

Software Data Protection (SDP)

The 29VE020 provides the JEDEC approved optional software data protection scheme for all data alteration operations, i.e., write and chip erase. With this scheme, any write operation requires the inclusion of a series of three byte-load operations to precede the data loading operation. The three byte-load sequence is used to initiate the write cycle, providing optimal protection from inadvertent write operations, e.g., during the system power-up or power-down. The 29VE020 is shipped with the software data protection disabled.

The software protection scheme can be enabled by applying a three-byte sequence to the device, during a page-load cycle (Figures 4 and 5). The device will then be automatically set into the data protect mode. Any subsequent write operation will require the preceding three-byte sequence. See Table 4 for the specific software command codes and Figures 4 and 5 for the timing diagrams. To set the device into the unprotected mode, a six-byte sequence is required. See Table 4 for the specific codes and Figure 8 for the timing diagram. If a write is attempted while SDP is enabled the device will be in a non-accessible state for ~ 300 µs. SST recommends Software Data Protection always be enabled. See Figure 16 for flowcharts.

The 29VE020 Software Data Protection is a global command, protecting (or unprotecting) all pages in the entire memory array once enabled (or disabled). Therefore using SDP for a single page write will enable SDP for the entire array. Single pages by themselves cannot be SDP enabled or disabled.

Single power supply reprogrammable nonvolatile memories may be unintentionally altered. SST

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

strongly recommends that Software Data Protect (SDP) always be enabled. The 29VE020 should be programmed using the SDP command sequence. SST recommends the SDP Disable Command Sequence not be issued to the device prior to writing.

Please refer to the following Application Notes located at the back of this databook for more information on using SDP:

- Protecting Against Unintentional Writes When Using Single Power Supply Flash Memories
- The Proper Use of JEDEC Standard Software Data Protection

Product Identification

The product identification mode identifies the device as the 29VE020 and manufacturer as SST. This mode may be accessed by hardware or software operations. The hardware operation is typically used by a programmer to identify the correct algorithm for the SST 29VE020. Users may wish to use the software product identification operation to identify the part (i.e., using the device code) when using multiple manufacturers in the same socket. For details, see Table 3 for hardware operation or Table 4 for software operation, Figure 10 for the software ID entry and read timing diagram and Figure 17 for the ID entry command sequence flowchart. The manufacturer and device codes are the same for both operations.

Table 1: Product Identification Table

	Byte	Data
Manufacturers Code	0000 H	BF H
Device Code	0001 H	12 H

Product Identification Mode Exit

In order to return to the standard read mode, the Software Product Identification mode must be exited. Exiting is accomplished by issuing the Software ID Exit (reset) operation, which returns the device to the read operation. The reset operation may also be used to reset the device to the read mode after an inadvertent transient condition that apparently causes the device to behave abnormally, e.g., not read correctly. See Table 4 for software command codes, Figure 11 for timing wavefrom and Figure 17 for a flowchart.

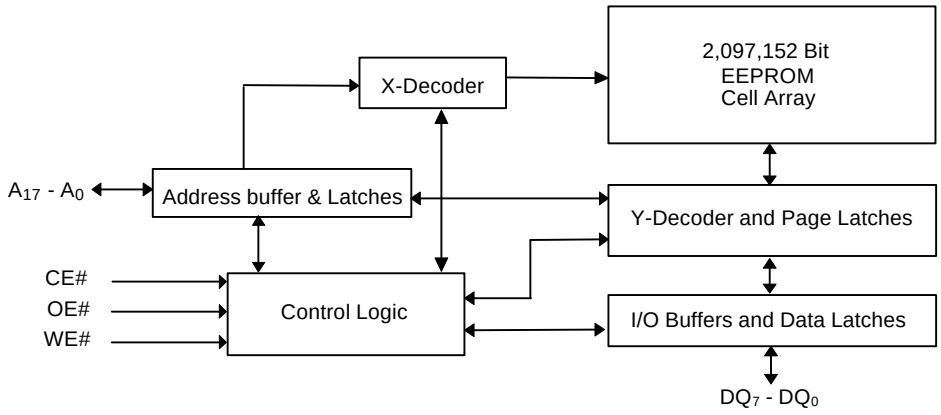

Figure 1: Functional Block Diagram of SST 29VE020

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

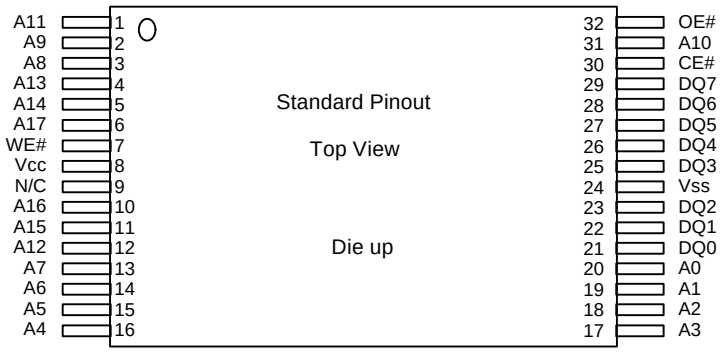

Figure 2A: Pin Assignments for 32-pin TSOP Pac kages

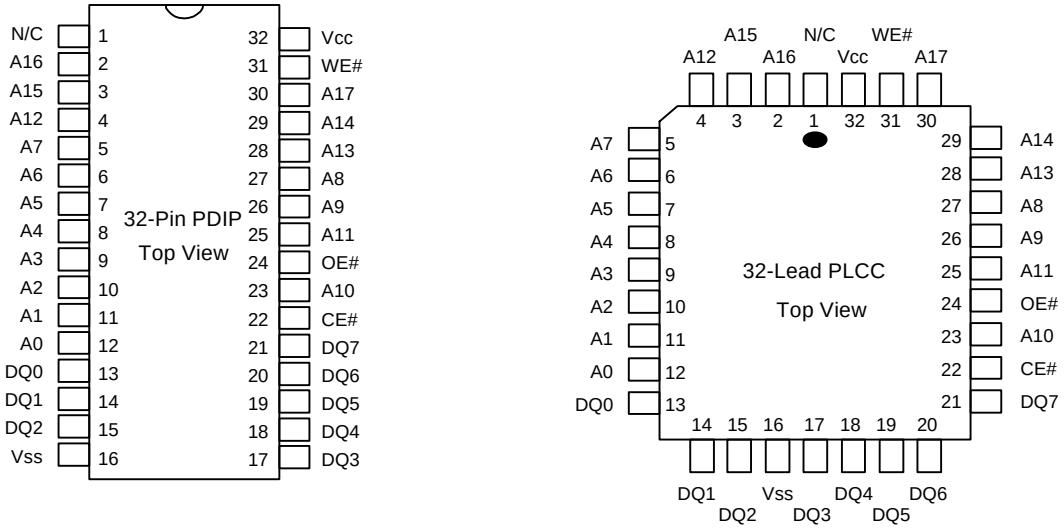

Figure 2B: Pin Assignments for 32-pin Plastic DIPs and 32-lead PLCCs

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Table 2: Pin Description

Symbol	Pin Name	Functions
A_{17}-A_7	Row Address Inputs	To provide memory addresses. Row addresses define a page for a write cycle.
A_6-A_0	Column Address Inputs	Column Addresses are toggled to load page data.
DQ_7-DQ_0	Data Input/output	To output data during read cycles and receive input data during write cycles. Data is internally latched during a write cycle. The outputs are in tri-state when OE# or CE# is high.
CE#	Chip Enable	To activate the device when CE# is low.
OE#	Output Enable	To gate the data output buffers.
WE#	Write Enable	To control the write operations
Vcc	Power Supply	To provide 3.0-volt supply (2.7 to 3.6V)
Vss	Ground	
NC	No Connection	Unconnected pins.

Table 3: Operation Modes Selection

Mode	CE#	OE#	WE#	DQ	Address
Read	V_{IL}	V_{IL}	V_{IH}	D_{OUT}	A_{IN}
Page Write	V_{IL}	V_{IH}	V_{IL}	D_{IN}	A_{IN}
Standby	V_{IH}	X	X	High Z	X
Write Inhibit	X	V_{IL}	X	High Z/ D_{OUT}	X
Write Inhibit	X	X	V_{IH}	High Z/ D_{OUT}	X
Software Chip Erase	V_{IL}	V_{IH}	V_{IL}	D_{IN}	A_{IN}, See Table 4
Product Identification					
Hardware Mode	V_{IL}	V_{IL}	V_{IH}	Manufacturer Code (BF)	A_{17} - A_1 = V_{IL}, A_9 = V_H, A_0 = V_{IL}
				Device Code (12)	A_{17} - A_1 = V_{IL}, A_9 = V_H, A_0= V_{IH}
Software Mode	V_{IL}	V_{IH}	V_{IL}		See Table 4
SDP Enable Mode	V_{IL}	V_{IH}	V_{IL}		See Table 4
SDP Disable Mode	V_{IL}	V_{IH}	V_{IL}		See Table 4

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Table 4: Software Command Codes

Command Sequence	1st Bus Write Cycle		2nd Bus Write Cycle		3rd Bus Write Cycle		4th Bus Write Cycle		5th Bus Write Cycle		6th Bus Write Cycle	
	Addr[1]	Data	Addr[1]	Data	Addr[1]	Data	Addr[1]	Data	Addr[1]	Data	Addr[1]	Data
Software Data Protect Enable & Page Write	5555H	AAH	2AAAH	55H	5555H	A0H	Addr[2]	Data				
Software Data Protect Disable	5555H	AAH	2AAAH	55H	5555H	80H	5555H	AAH	2AAAH	55H	5555H	20H
Software Chip Erase	5555H	AAH	2AAAH	55H	5555H	80H	5555H	AAH	2AAAH	55H	5555H	10H
Software ID Entry	5555H	AAH	2AAAH	55H	5555H	90H						
Software ID Exit	5555H	AAH	2AAAH	55H	5555H	F0H						
Alternate Software ID Entry[3]	5555H	AAH	2AAAH	55H	5555H	80H	5555H	AAH	2AAAH	55H	5555H	60H

Notes: (1) Address format A_{14}-A_0 (Hex), Address A_{15} is a "Don't Care".

(2) Page Write consists of loading up to 128 bytes (A_6 - A_0).

(3) Alternate 6 byte Software Product ID Command Code

(3) The software chip erase function is not supported by the industrial temperature part. Please contact SST, if you require this function for an industrial temperature part.

Notes for Software Product ID Command Code:

1. With A_{14} -A_1 =0; SST Manufacturer Code = BFH, is read with A_0 = 0,

   29VE020 Device Code = 12H, is read with A_0 = 1.

2. The device does not remain in Software Product ID Mode if powered down.

3. This product supports both the JEDEC standard 3 byte command code sequence and SST's original 6 byte command code sequence. For new designs, SST recommends that the 3 byte command code sequence be used.

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Absolute Maximum Stress Ratings (Applied conditions greater than those listed under "Absolute Maximum Stress Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these conditions or conditions greater than those defined in the operational sections of this data sheet is not implied. Exposure to absolute maximum stress rating conditions may affect device reliability.)

Temperature Under Bias	-55°C to +125°C
Storage Temperature	-65°C to +150°C
D. C. Voltage on Any Pin to Ground Potential	-0.5V to V_{CC}+ 0.5V
Transient Voltage (<20 ns) on Any Pin to Ground Potential	-1.0V to V_{CC}+ 1.0V
Voltage on A_9 Pin to Ground Potential	-0.5V to 14.0V
Package Power Dissipation Capability (Ta = 25°C)	1.0W
Through Hole Lead Soldering Temperature (10 Seconds)	300°C
Surface Mount Lead Soldering Temperature (3 Seconds)	240°C
Output Short Circuit Current(1)	100 mA

Note: (1) Outputs shorted for no more than one second. No more than one output shorted at a time.

Operating Range

Range	Ambient Temp	V_{CC}
Commercial	0 °C to +70 °C	2.7 to 3.6V
Industrial	-40 °C to +85 °C	2.7 to 3.6V

AC Conditions of Test

Input Rise/Fall Time.....10 ns
Output Load.....1 TTL Gate and C_L = 100 pF
See Figures 12 and 13

Table 5: DC Operating Characteristics

Symbol	Parameter	Limits			Test Conditions
		Min	Max	Units	
I_{CC}	Power Supply Current				CE#=OE#=V_{IL}, WE#=V_{IH}, all I/Os open,
	Read		12	mA	Address input = V_{IL}/V_{IH}, at f=1/T_{RC} Min., V_{CC}=V_{CC} Max
	Write		15	mA	CE#=WE#=V_{IL}, OE#=V_{IH}, V_{CC} =V_{CC} Max.
I_{SB1}	Standby V_{CC} Current (TTL input)		1	mA	CE#=OE#=WE#=V_{IH}, V_{CC} =V_{CC} Max.
I_{SB2}	Standby V_{CC} Current (CMOS input)		15	µA	CE#=OE#=WE#=V_{CC} -0.3V. V_{CC} = V_{CC} Max.
I_{LI}	Input Leakage Current		1	µA	V_{IN} =GND to V_{CC}, V_{CC} = V_{CC} Max.
I_{LO}	Output Leakage Current		10	µA	V_{OUT} =GND to V_{CC}, V_{CC} = V_{CC} Max.
V_{IL}	Input Low Voltage		0.8	V	V_{CC} = V_{CC} Max.
V_{IH}	Input High Voltage	2.0		V	V_{CC} = V_{CC} Max.
V_{OL}	Output Low Voltage		0.4	V	I_{OL} = 100 µA, V_{CC} = V_{CC} Min.
V_{OH}	Output High Voltage	2.4		V	I_{OH} = -100 µA, V_{CC} = V_{CC} Min.
V_H	Supervoltage for A_9	11.6	12.4	V	CE# = OE# =V_{IL}, WE# = V_{IH}
I_H	Supervoltage Current for A_9		200	µA	CE# = OE# = V_{IL}, WE# = V_{IH}, A_9 = V_H Max.

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Table 6: Power-up Timings

Symbol	Parameter	Maximum	Units
$T_{PU-READ}$ (1)	Power-up to Read Operation	100	µs
$T_{PU-WRITE}$ (1)	Power-up to Write Operation	5	ms

Table 7: Capacitance (Ta = 25 °C, f=1 Mhz, other pins open)

Parameter	Description	Test Condition	Maximum
$C_{I/O}$ (1)	I/O Pin Capacitance	$V_{I/O}$ = 0V	12 pF
C_{IN} (1)	Input Capacitance	V_{IN} = 0v	6 pF

Note: (1)This parameter is measured only for initial qualification and after a design or process change that could affect this parameter.

Table 8: Reliability Characteristics

Symbol	Parameter	Minimum Specification	Units	Test Method
N_{END}	Endurance	1,000 & 10,000(2)	Cycles	MIL-STD-883, Method 1033
T_{DR} (1)	Data Retention	100	Years	MIL-STD-883, Method 1008
V_{ZAP_HBM} (1)	ESD Susceptibility Human Body Model	1000	Volts	JEDEC Standard A114
V_{ZAP_MM} (1)	ESD Susceptibility Machine Model	200	Volts	JEDEC Standard A115
I_{LTH} (1)	Latch Up	100	mA	JEDEC Standard 17

Note: (1)This parameter is measured only for initial qualification and after a design or process change that could affect this parameter.

(2)See Ordering Information for desired type.

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

AC Characteristics

Table 9: Read Cycle Timing Parameters

Symbol	Parameter	29VE020-200		29VE020-250		Units
		Min	Max	Min	Max	
T_{RC}	Read Cycle time	200		250		ns
T_{CE}	Chip Enable Access Time		200		250	ns
T_{AA}	Address Access Time		200		250	ns
T_{OE}	Output Enable Access Time		100		120	ns
T_{CLZ} (1)	CE# Low to Active Output	0		0		ns
T_{OLZ} (1)	OE# Low to Active Output	0		0		ns
T_{CHZ} (1)	CE# High to High-Z Output		50		50	ns
T_{OHZ} (1)	OE# High to High-Z Output		50		50	ns
T_{OH} (1)	Output Hold from Address Change	0		0		ns

Table 10: Page-Write Cycle Timing Parameters

Symbol	Parameter	Min	Max	Units
T_{WC}	Write Cycle (erase and program)		10	ms
T_{AS}	Address Setup Time	0		ns
T_{AH}	Address Hold Time	50		ns
T_{CS}	WE# and CE# Setup Time	0		ns
T_{CH}	WE# and CE# Hold Time	0		ns
T_{OES}	OE# High Setup Time	0		ns
T_{OEH}	OE# High Hold Time	0		ns
T_{CP}	CE# Pulse Width	70		ns
T_{WP}	WE# Pulse Width	70		ns
T_{DS}	Data Setup Time	35		ns
T_{DH}	Data Hold Time	0		ns
T_{BLC} (1)	Byte Load Cycle Time	0.05	100	µs
T_{BLCO} (1)	Byte Load Cycle Time	200		µs
T_{IDA}	Software ID Access and Exit Time		10	µs
T_{SCE}	Software Chip Erase		20	ms

Note: (1)This parameter is measured only for initial qualification and after the design or process change that could affect this parameter.

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

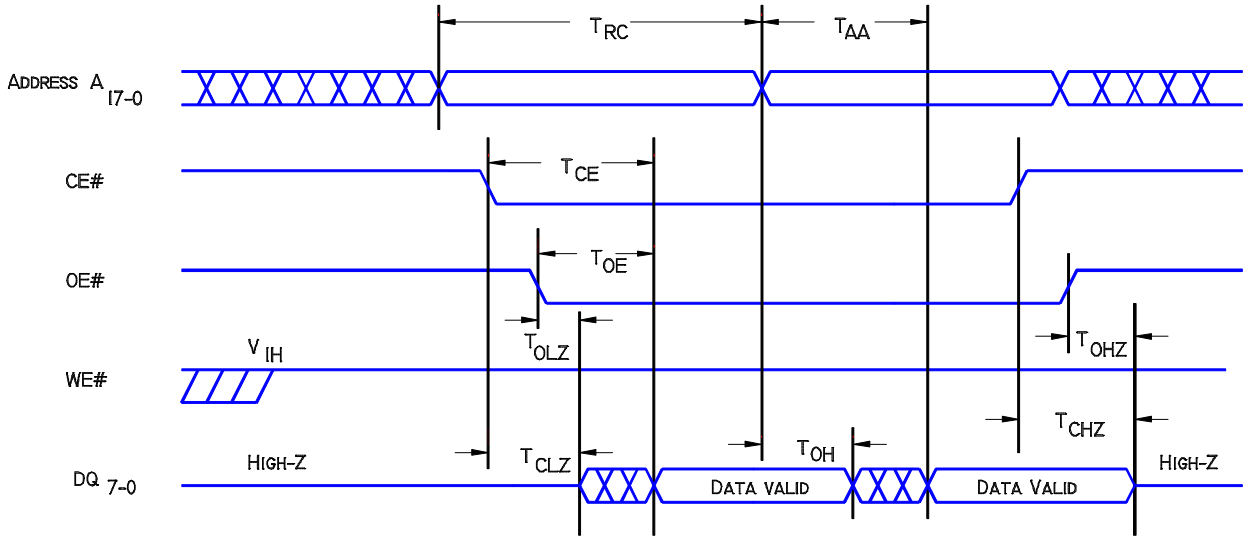

Figure 3: Read Cycle Timing Diagram

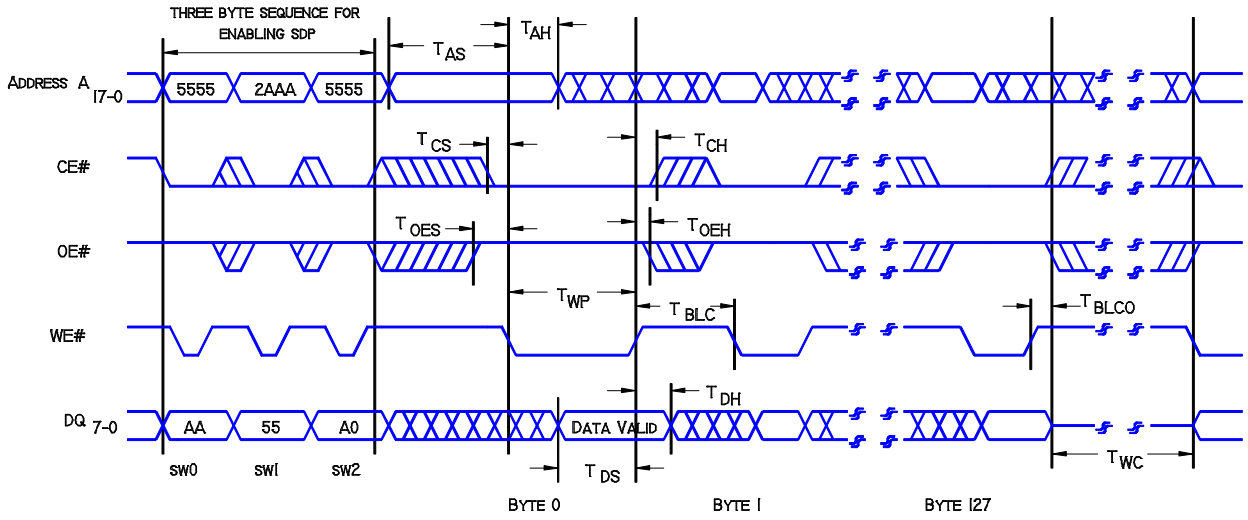

Figure 4: WE# Controlled Page Write Cycle Timing Diagram

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

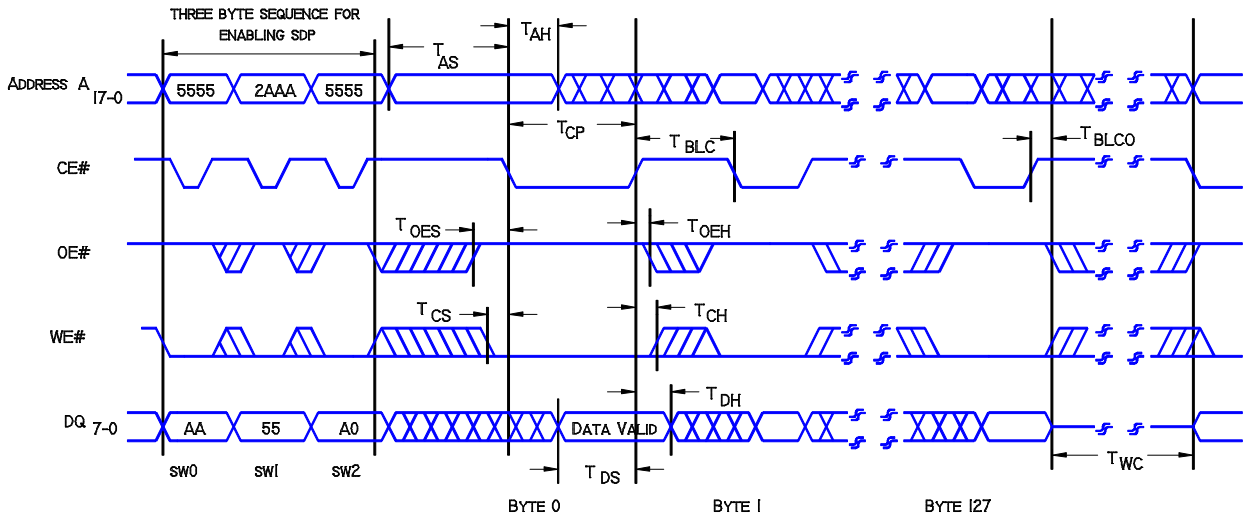

Figure 5: CE# Controlled Page Write Cycle Timing Diagram

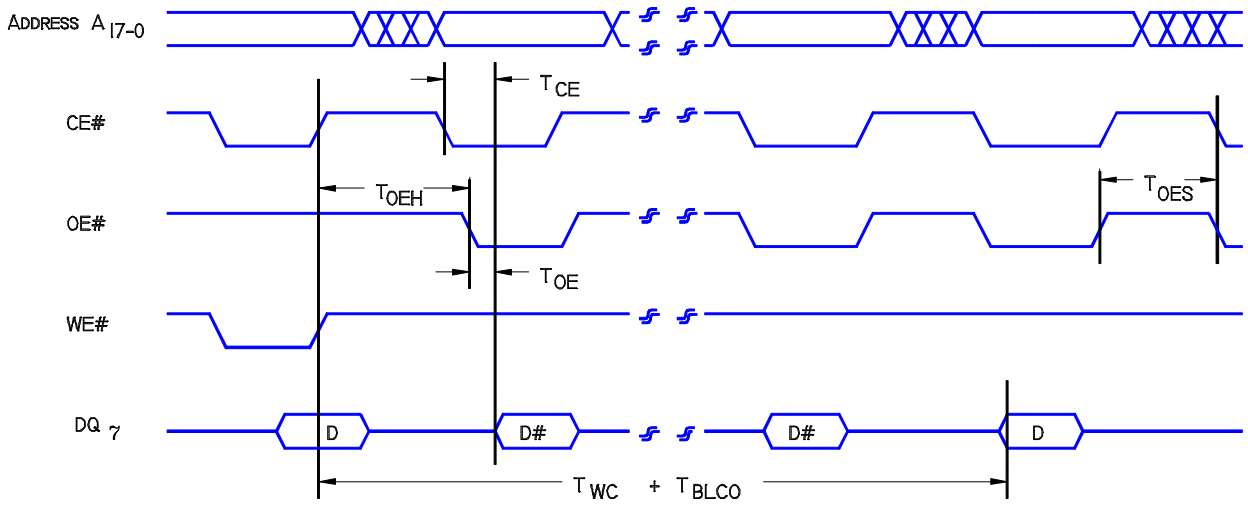

Figure 6: Data# Polling Timing Diagram

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

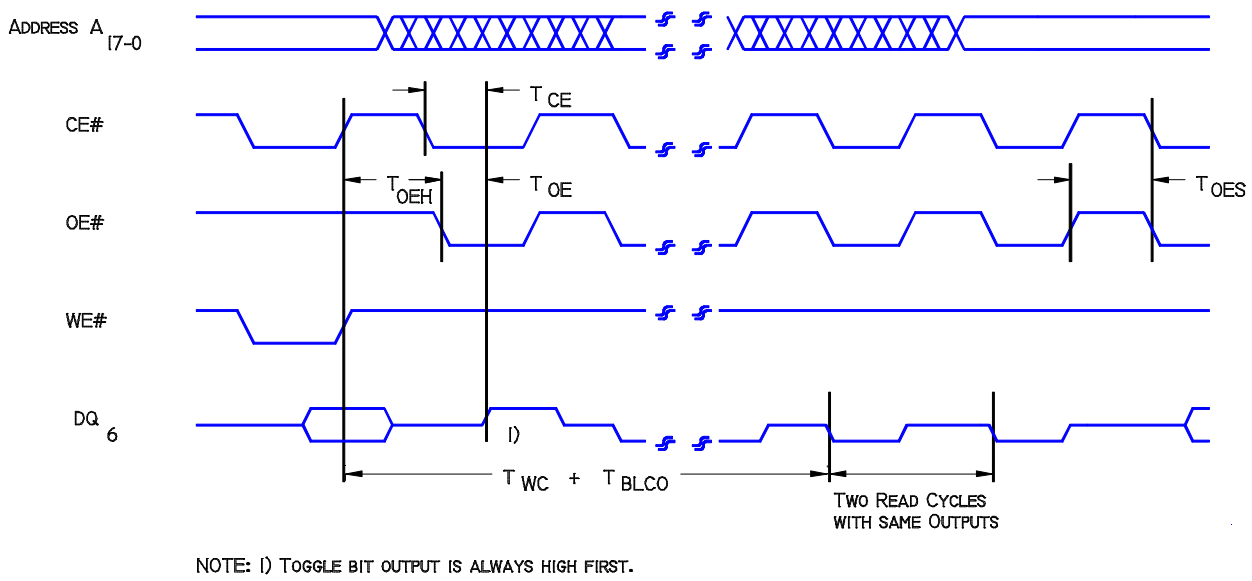

Figure 7: Toggle Bit Timing Diagram

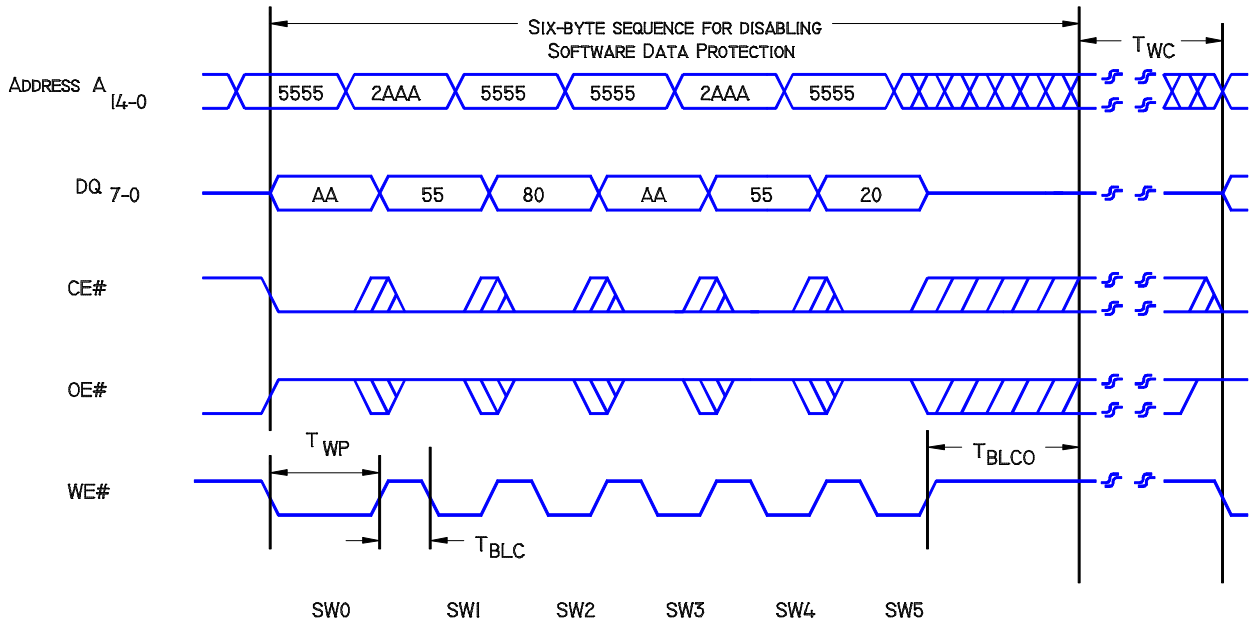

Figure 8: Software Data Protect Disable Timing Diagram

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

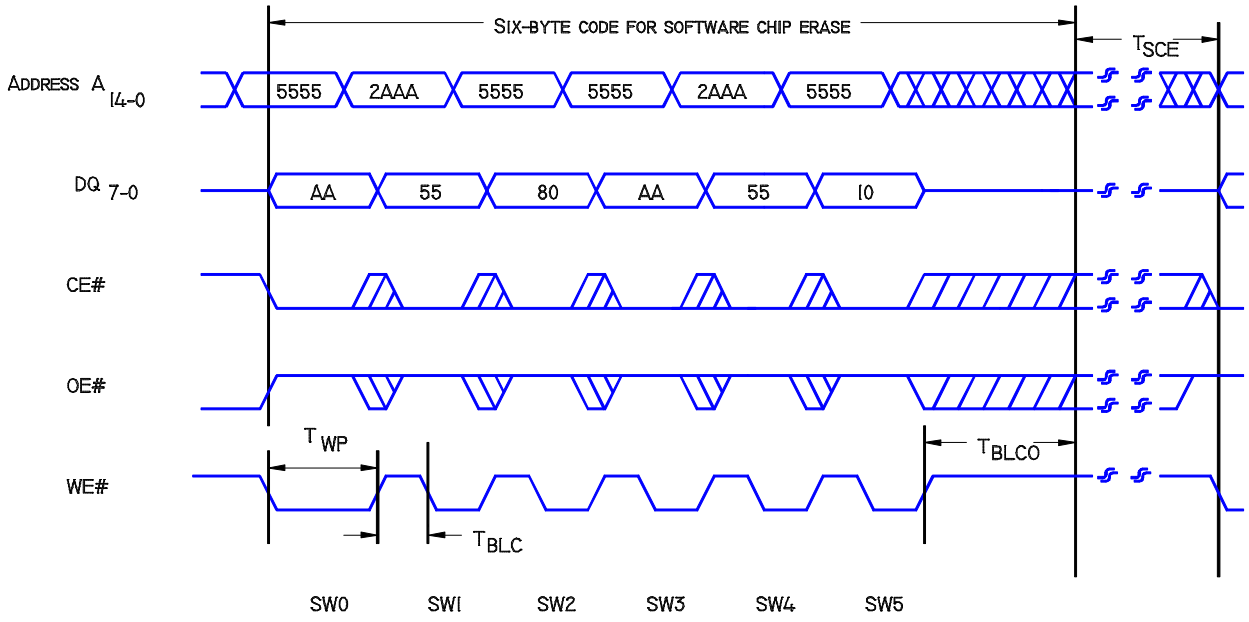

Figure 9: Software Chip Erase Timing Diagram

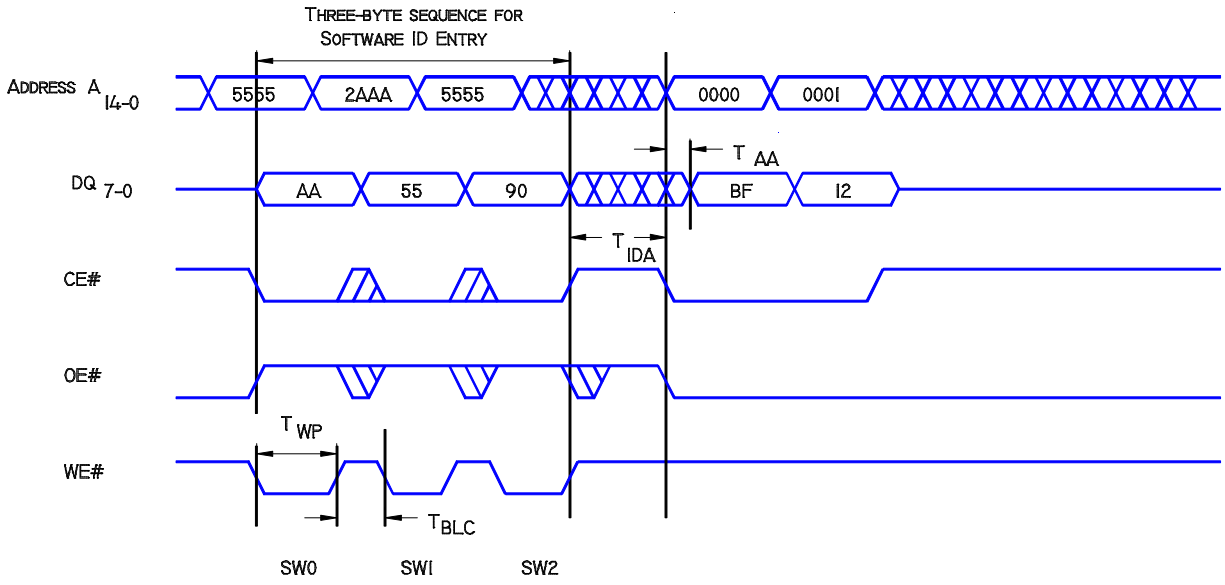

Figure 10: Software ID Entry and Read

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

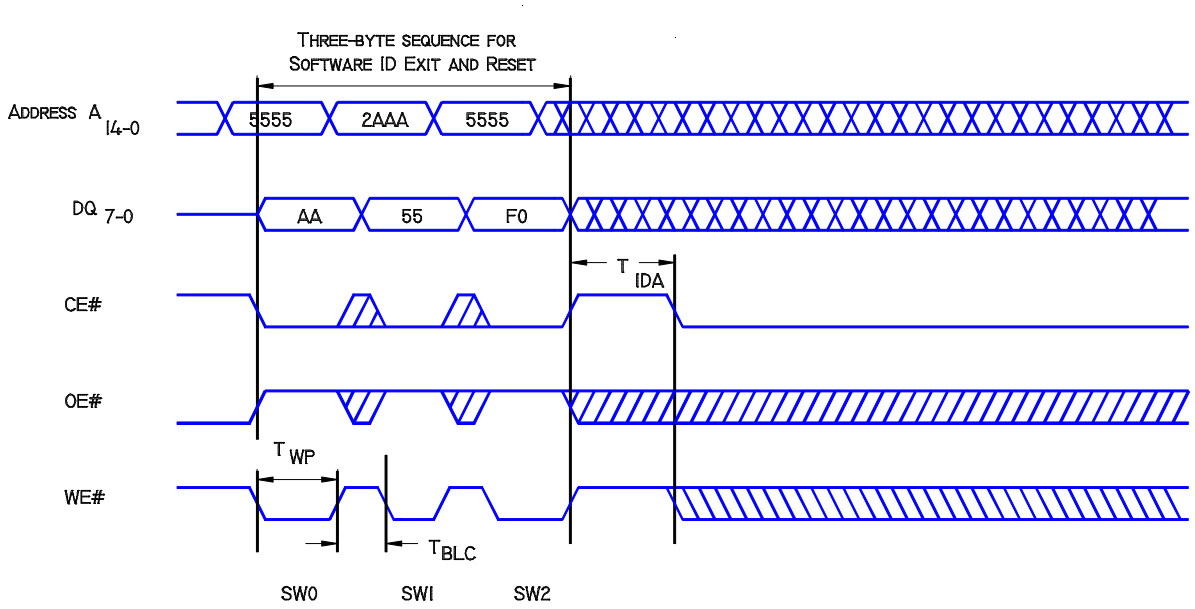

Figure 11: Software ID Exit and Reset

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

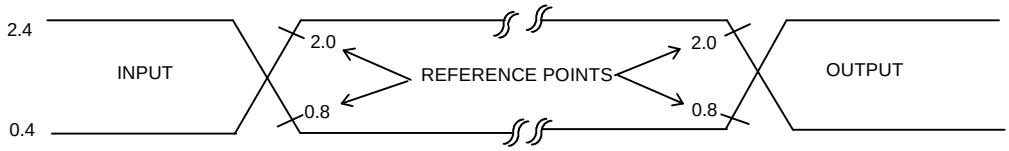

AC test inputs are driven at V_{OH} (2.4 V_{TTL}) for a logic "1" and V_{OL} (0.4 V_{TTL}) for a logic "0". Measurement reference points for inputs and outputs are V_{IH} (2.0 V_{TTL}) and V_{IL} (0.8 V_{TTL}). Inputs rise and fall times (10% ↔ 90%) are <10 ns.

Figure 12: AC Input/Output Reference Waveforms

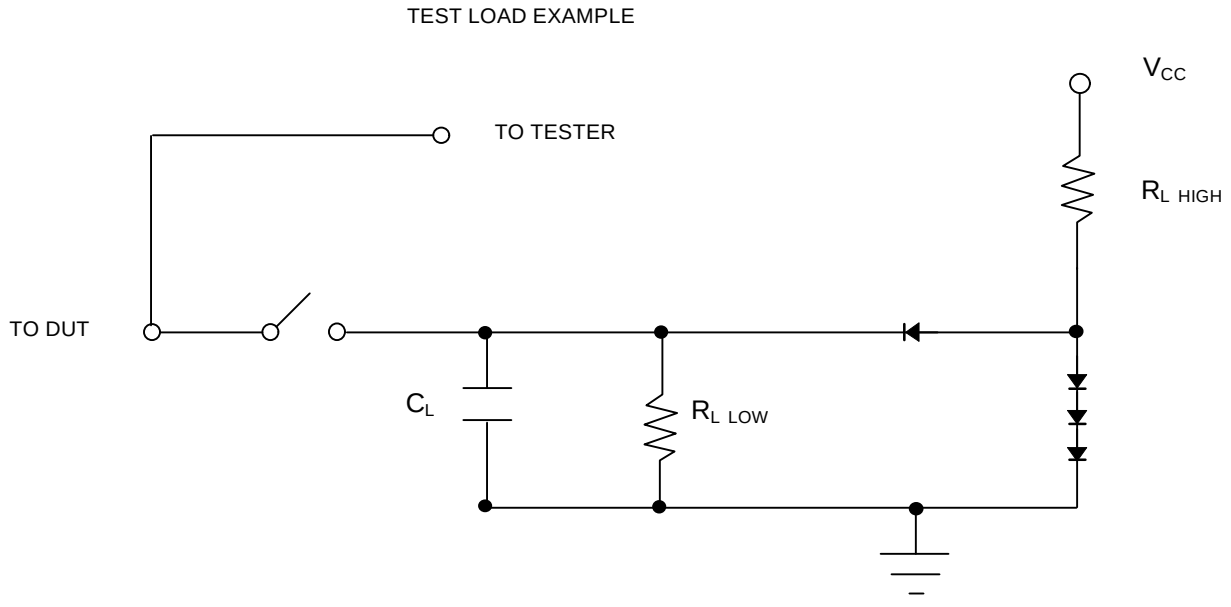

Figure 13: Test Load Example

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

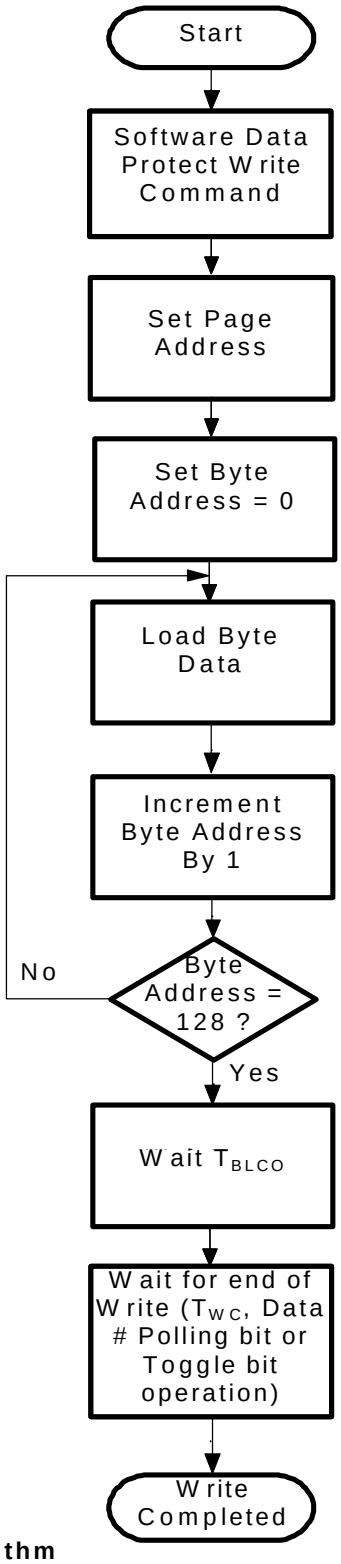

Figure 14: Write Algorithm

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

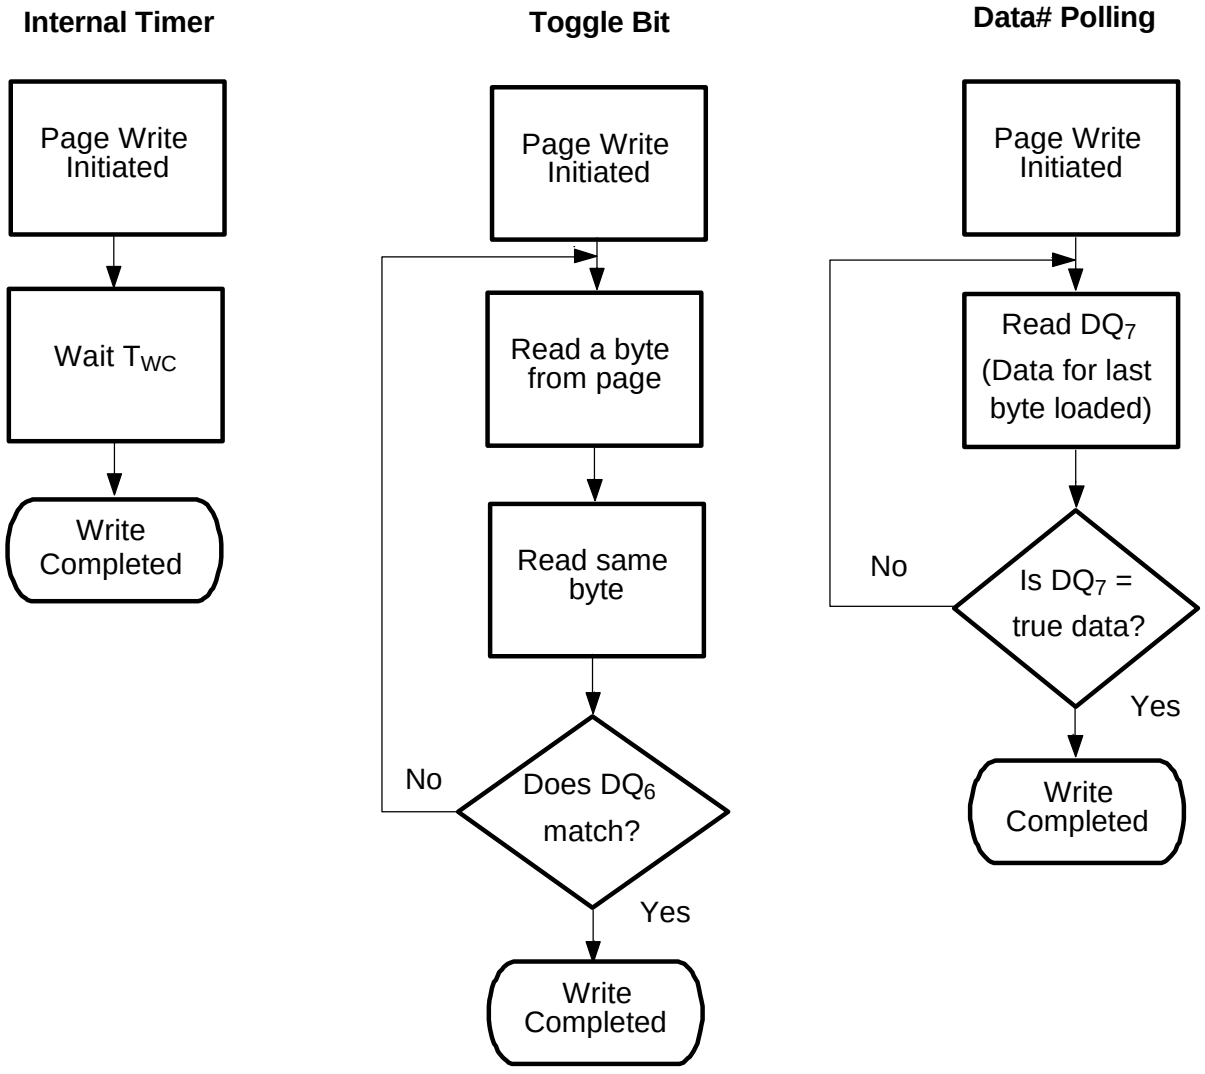

Figure 15: Wait Options

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

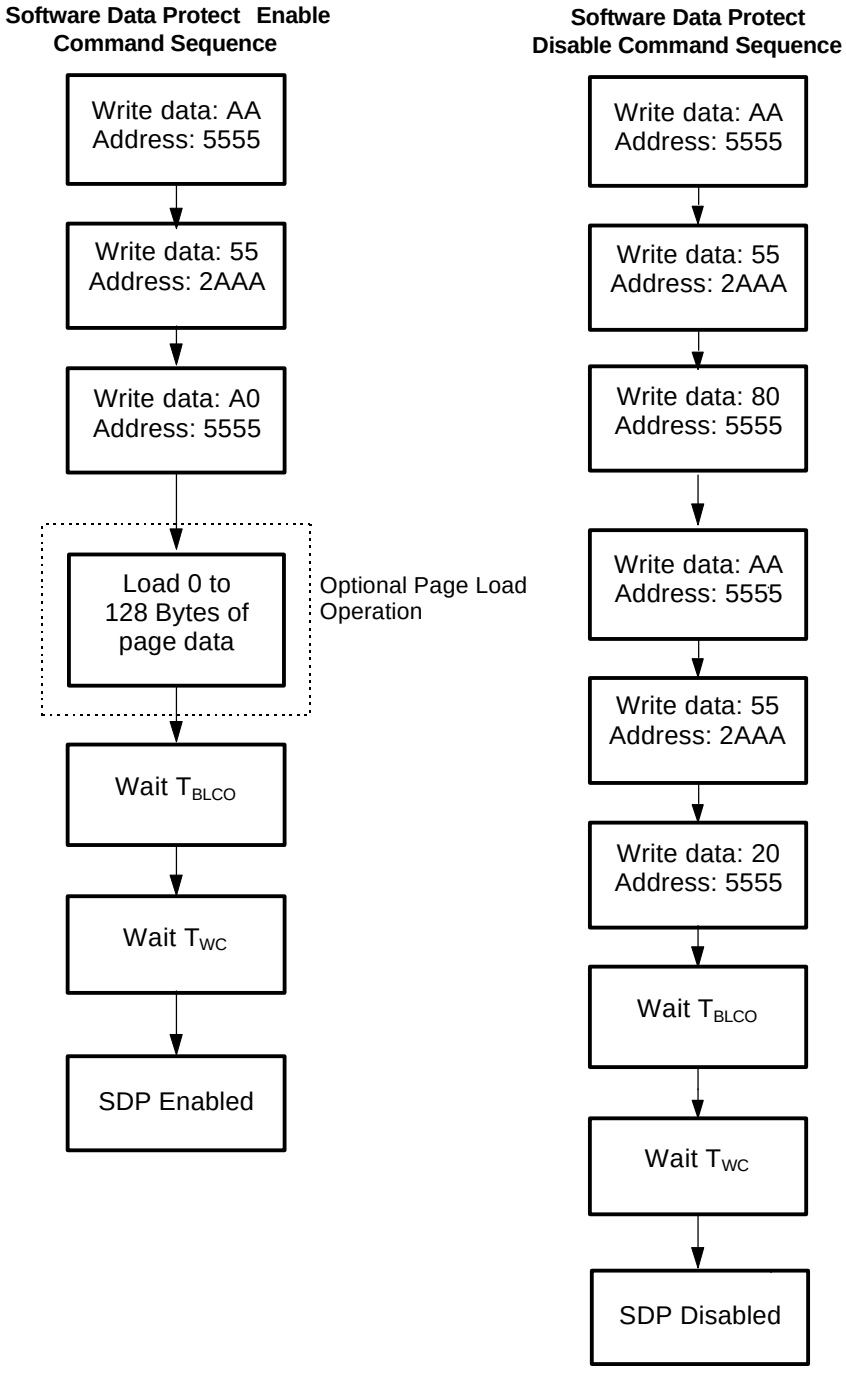
Software Data Protect Enable Command Sequence
Write data: AA Address: 5555
Write data: 55 Address: 2AAA
Write data: A0 Address: 5555
Load 0 to 128 Bytes of page data
Optional Page Load Operation
Wait T_{BLCO}
Wait T_{WC}
SDP Enabled
Software Data Protect Disable Command Sequence
Write data: AA Address: 5555
Write data: 55 Address: 2AAA
Write data: 80 Address: 5555
Write data: AA Address: 5555
Write data: 55 Address: 2AAA
Write data: 20 Address: 5555
Wait T_{BLCO}
Wait T_{WC}
SDP Disabled

Figure 16: Software Data Protection Flowcharts

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

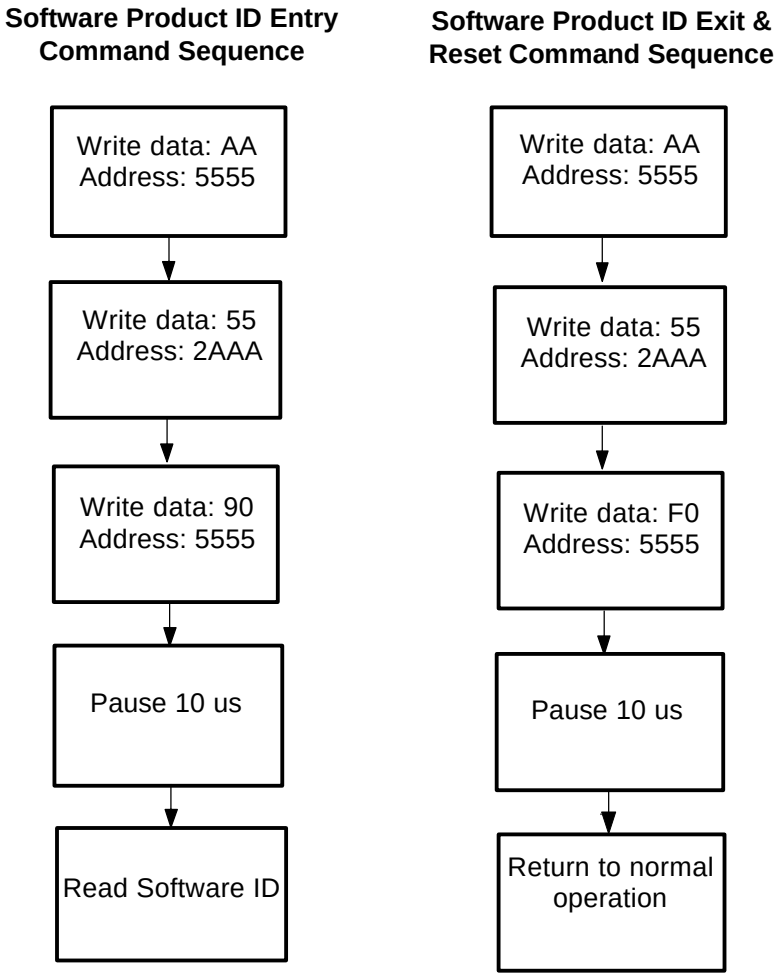

Figure 17: Software Product Command Flowcharts

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

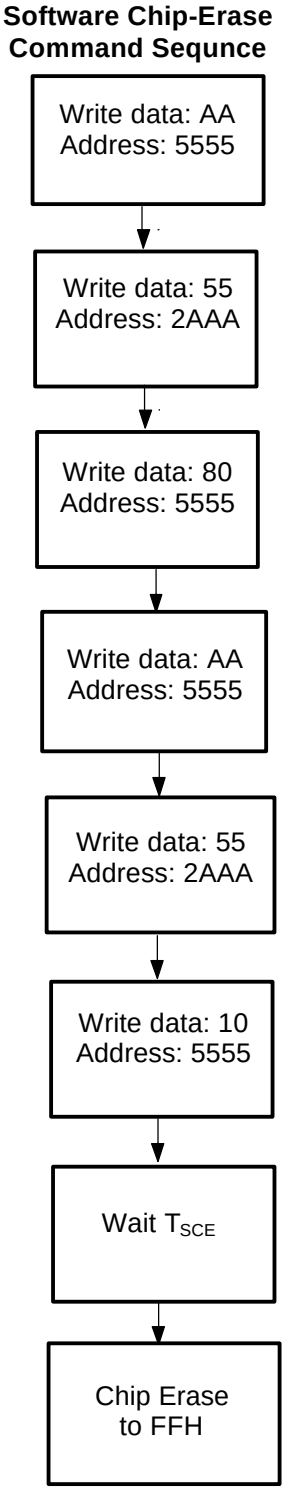

Figure 18: Software Chip Erase Command Codes

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Product Ordering Information

Device **Speed** **Suffix1** **Suffix2**

SST29VE020 - XXX - XX - XX

Package Modifier
H = 32 leads
Numeric = Die modifier

Package Type
P = PDIP
N = PLCC
E = TSOP (die up)
U = Unencapsulated die

Operating Temperature
C = Commercial = 0° to 70°C
I = Industrial = -40° to 85°C

Minimum Endurance
3 = 1000 cycles
4 = 10,000 cycles

Read Access Speed
250 = 250 ns
200 = 200 ns

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.

Valid combinations

SST29VE020-200-4C-EH	SST29VE020-200-4C-NH	SST29VE020-200-4C-PH
SST29VE020-250-4C-EH	SST29VE020-250-4C-NH	SST29VE020-250-4C-PH
SST29VE020-200-4I-EH	SST29VE020-200-4I-NH	
SST29VE020-250-4I-EH	SST29VE020-250-4I-NH	SST29VE020-250-4C-U1

Example: Valid combinations are those products in mass production or will be in mass production. Consult your SST sales representative to confirm availability of valid combinations and to determine availability of new co mbinations.

Note: The software chip erase function is not supported by the industrial temperatu re part.
Please contact SST, if you require this function for an industrial temperature part.

©1997 Silicon Storage Technology, Inc. The SST logo and SuperFlash are registered trademarks of Silicon Storage Technology, Inc.
This specification is subject to change without notice.